


# Spar buoy 160/6, /4, /3, /2 LTR

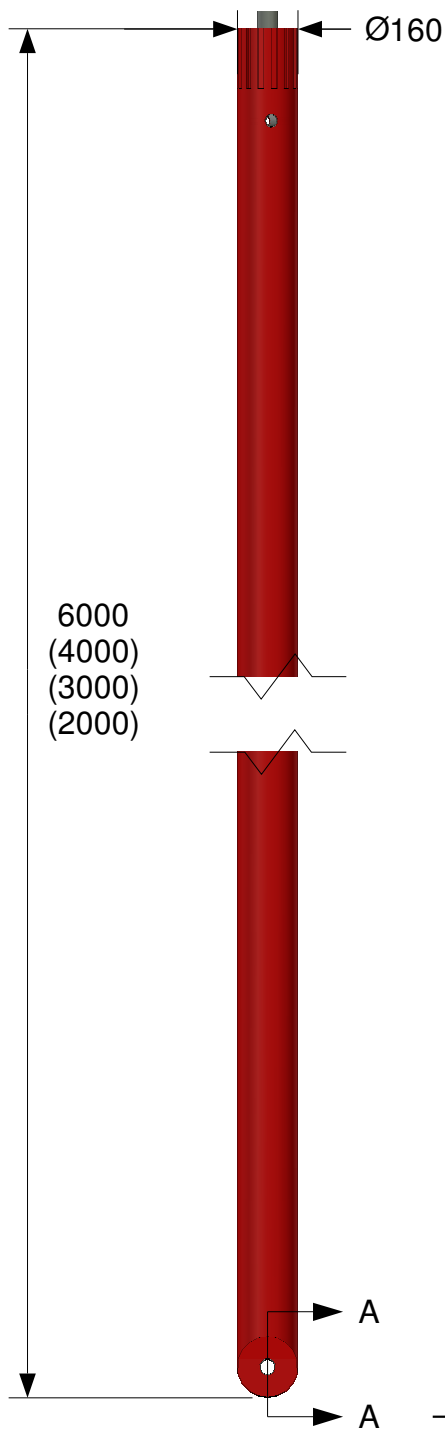

## Specifications

Weight: 160/6 20 kg, 160/4 14 kg, 160/3 11 kg, 160/2 7 kg

Color: IALA recommendation E-108

Retro-reflector: IALA recommendation R0106(E-106)

Visibility: Hight over waterline 3 m, 2 m, 1,5 m, 1 m

Radar reflector: Integrated

Outer shell: Dyed through MDPE

Filling: Expanded polystyrene (EPS)

Lifting: Lifting hole, 31 mm, for handling the spar buoys own weight

External ballast: 160/6 40 kg, 160/4 25 kg, 160/3 20 kg, 160/2 15 kg, not included

## Accessories

Topmark

Steel ring, A4 Ø40 mm

ROTATIONSPLAST i Munka Ljungby AB  
Företagaregatan 13  
S-266 32 Munka Ljungby  
Tel +46 (0)431 - 43 07 40  
Epost: [info@rotationsplast.se](mailto:info@rotationsplast.se)

ROTATIONSPLAST