


Light buoy 500/5

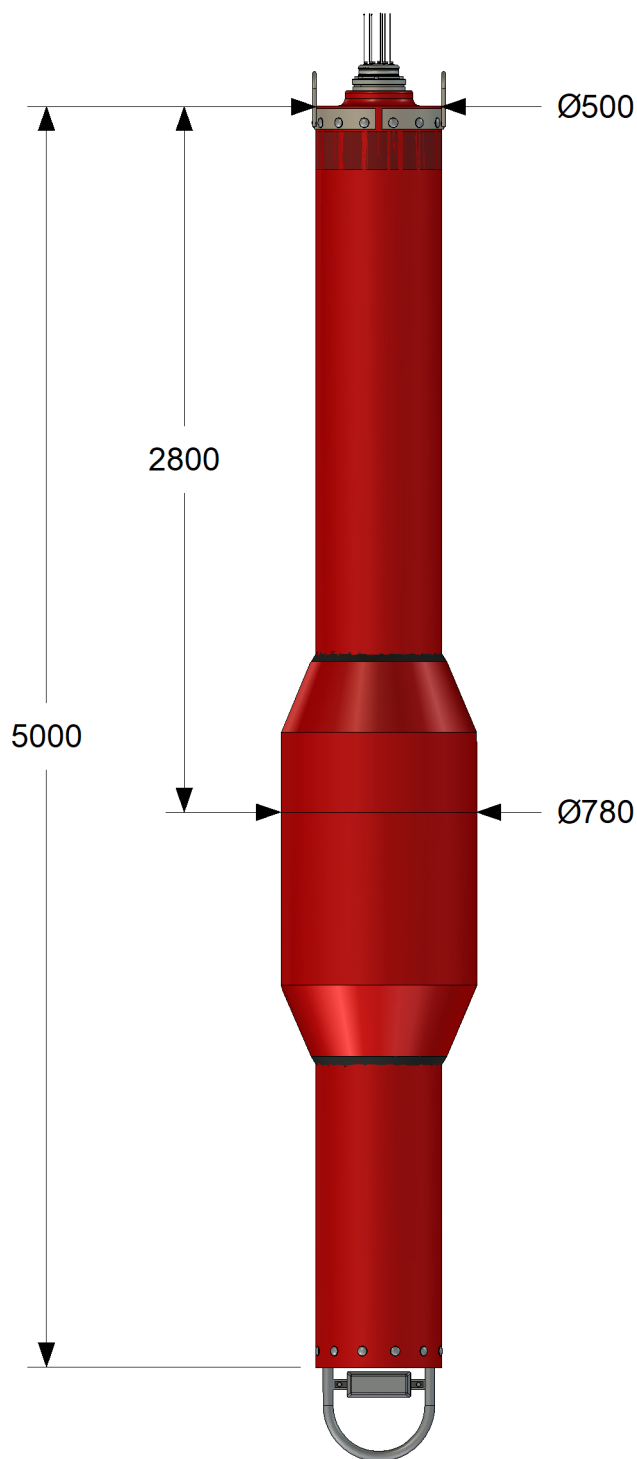

Specifications

Weight: 260 kg, batteries, light and external ballast not included

Color: IALA recommendation E-108

Retro-reflector: IALA recommendation R0106(E-106)

Visibility: Hight over waterline 2,8 m, visible area 1,5 m²

Radar reflector: Integrated

Outer shell: Dyed through MDPE 8 mm

Inner pipe: MDPE 500 x 19,1 mm

Filling: Expanded polystyrene (EPS)

Lifting: Lifting eyes for handling the spar buoys own weight

Anode: Zn-anod Typ 20

External ballast: Approximately 400 kg iron, not included

Accessories

Lantern: Sabik VP-LED as default

Battery: Celltech AL 14-18 200 Ah

ROTATIONSPLAST

ROTATIONSPLAST i Munka Ljungby AB
Företagaregatan 13
S-266 32 Munka Ljungby
Tel +46 (0)431 - 43 07 40
Epost: info@rotationsplast.se