


# Light buoy 724/6

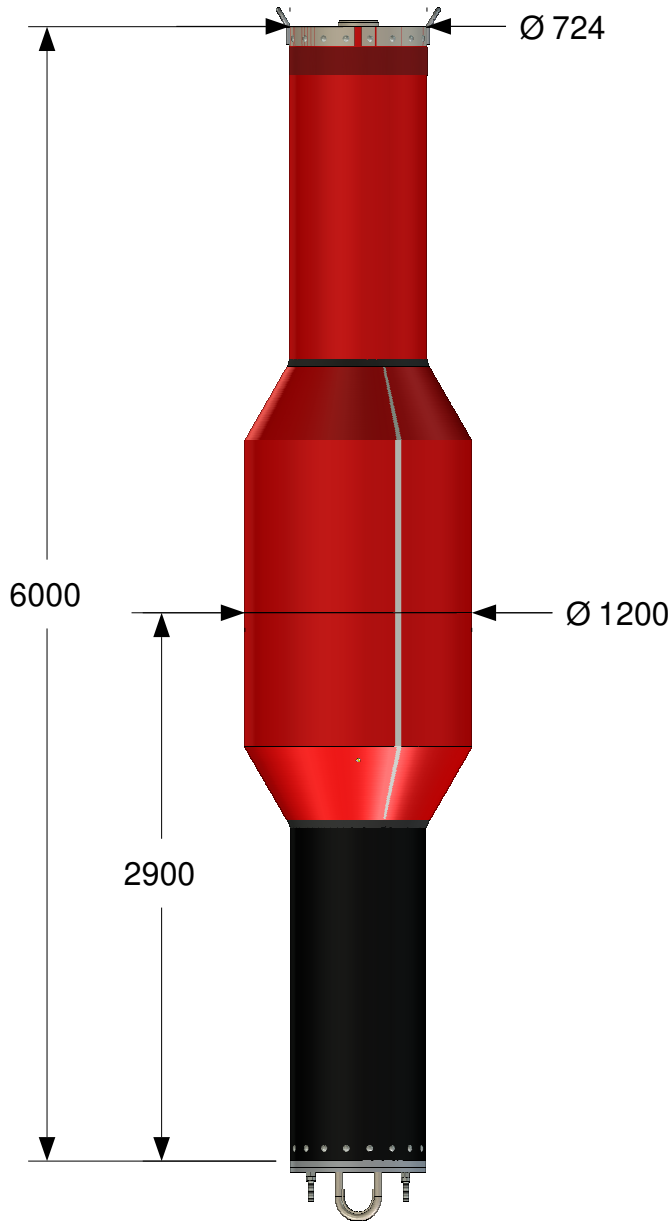

## Specifications

Weight: 940 kg, batteries, light external ballast not included

Color: IALA:s recommendation E-108

Retro-reflector: IALA:s recommendation R0106(E-106)

Visibility: Hight over waterline 3,1 m, visible area 2,8 m<sup>2</sup>

Radar reflector: Integrated

Outer shell: Dyed through, MDPE 8 mm,

Inner pipe: MDPE 710 x 27,2 mm

Filling: Expanded polystyrene (EPS)

Lifting: Lifting eyes for handling the spar buoys own weight

Anode: Zink

External ballast: Approximately 860 kg iron, not included

Lifting force: Approximately 1800 kg

Accessories

Lantern: Sabik VP2 or NG-BI-200

Battery: Celltech AL 14-18 200 Ah

**ROTATIONS**PLAST

ROTATIONSPLAST i Munka Ljungby AB  
Företagaregatan 13  
S-266 32 Munka Ljungby  
Tel +46 (0)431 - 43 07 40  
Epost: [info@rotationsplast.se](mailto:info@rotationsplast.se)